

Features



Zypad WL15xx Kit

Your kit includes the following components:

- Zypad WL15xx
- Wrist strap with armband
- Stylus
- Lithium-Ion battery pack
- AC adapter and regional power cord
- USB host cable (for terminal)
- Y-USB client cable (for USB & power)


For full product details, download the *Zypad WL15xx User Manual (#110125-0000)* from the Eurotech Support Forums.

Use only the Li-Ion battery pack provided by Eurotech. Use of any other battery pack will void your warranty and may damage your system.

Observe the precautions detailed in the user manual, as well as good technical judgment, whenever this product is used.

Y-USB Client Cable

The Y-USB client cable allows for data communication to a PC and fast charging simultaneously. Note that the AC adapter can connect directly to the USB device port, if the host PC connection is not required.

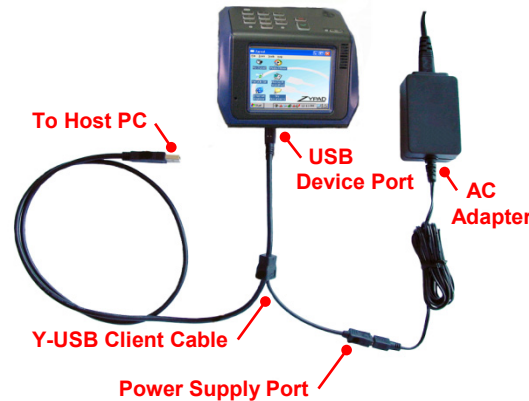

Charging the Battery

The battery pack is discharged when shipped and must be fully charged before first use. Charge the battery using one of the following methods:

Method	Charging Time (Max Hours)
Battery charger station	6
USB device port directly to AC adapter	6
USB device port to host PC using Y-USB client cable	11

Recovering from a Low Charge

If the battery drains below 10% charge during system use, complete the following steps to reboot the system and recharge the battery pack:

1. Remove the battery pack for 15 sec. minimum.
2. Plug the AC adapter into the USB device port.
3. Boot the system.
4. Install the battery pack to recharge.

Assembling your Zypad


Installing the Battery

Install the battery by aligning it with the enclosure and pressing it into place. Secure the external locking screws.



Installing the Wrist Strap

Fasten the wrist strap to the strap holders and adjust for a comfortable fit on either arm.

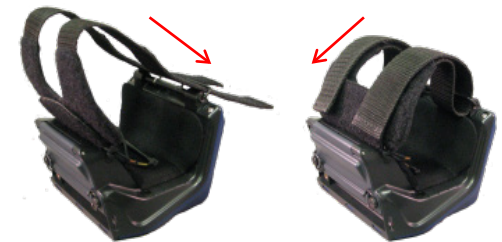

The wrist strap can be removed for machine washing.

Machine Washing Care Labels



Replacing the Battery

The Zypad WL15xx supports “hot-swapping” the battery when in Suspend mode. For instructions, refer to the *Zypad WL15xx User Manual*.

Getting Started



- Ambient Light Sensor
- Wi-Fi/Cellular LED
- Programmable Keys
- Power Button
- Power LED
- Bluetooth LED

Turning the System On/Off

The Power button performs as follows:

Power Button	Result
Press and hold (1 sec)	Turns on from power off
Momentarily press (less than 1 sec)	Enters or exits Suspend
Press and hold (3 sec)	Performs a power off

When the system is initializing, either from power off or Suspend, the Wi-Fi/Cellular and Bluetooth LEDs blink, assuming these features are enabled. Initiating Suspend before the blinking stops forces the system to sleep. In this case, a momentary press of the Power button will cause the system to reboot instead of waking up.

Operating System Details

The system boots to the Windows® CE desktop.

You do not have to perform a shutdown from the operating system before you turn off power. However, be sure to save any unsaved data.

For details about developing applications, see the *Zypad WL15xx Programmer Reference* (#110125-0002).

I/O Panel



- Headset Jack
- SIM Card
- USB Device
- Reset Button
- USB Host
- microSD Card

To access the I/O panel, remove the protective cover located on the bottom side of your Zypad WL15xx.

Resetting the System

To reset, lightly press the reset button by inserting a small-tipped object, such as the stylus, into the hole on the I/O panel. Press only if there is a catastrophic fault or hang of the OS. Be sure to save any data within a running application before resetting the system.

Connecting a Bar Code Reader (optional)

Connect an external bar code reader to the USB host port on the Zypad WL15xx.



The system automatically recognizes the ZRS-2D ring scanner. For details about the ZRS-2D, download the *ZRS-2D User Manual* from the Eurotech site

www.eurotech.com

Connecting to a Network

The Zypad WL15xx supports cellular, Wi-Fi, and Bluetooth network connections. Your system may include one or more of these modules.

Cellular

Install your SIM card into the card slot located on the I/O panel to configure the integrated cellular modem.

Wi-Fi

Follow the instructions in the user manual to configure a Wi-Fi connection.

Bluetooth

To connect to an external device, follow the instructions in the user manual for adding a Trusted Bluetooth device.

Technical Support

Support forums, errata reports, and the latest documents are available to registered users at

support.eurotech-inc.com/

Contact Us

EUROTECH

Toll-free +1 888.941.2224

Tel. +1 301.490.4007

Fax +1 301.490.4582

E-mail: sales.us@eurotech.com

E-mail: support.us@eurotech.com

Web: www.eurotech-inc.com