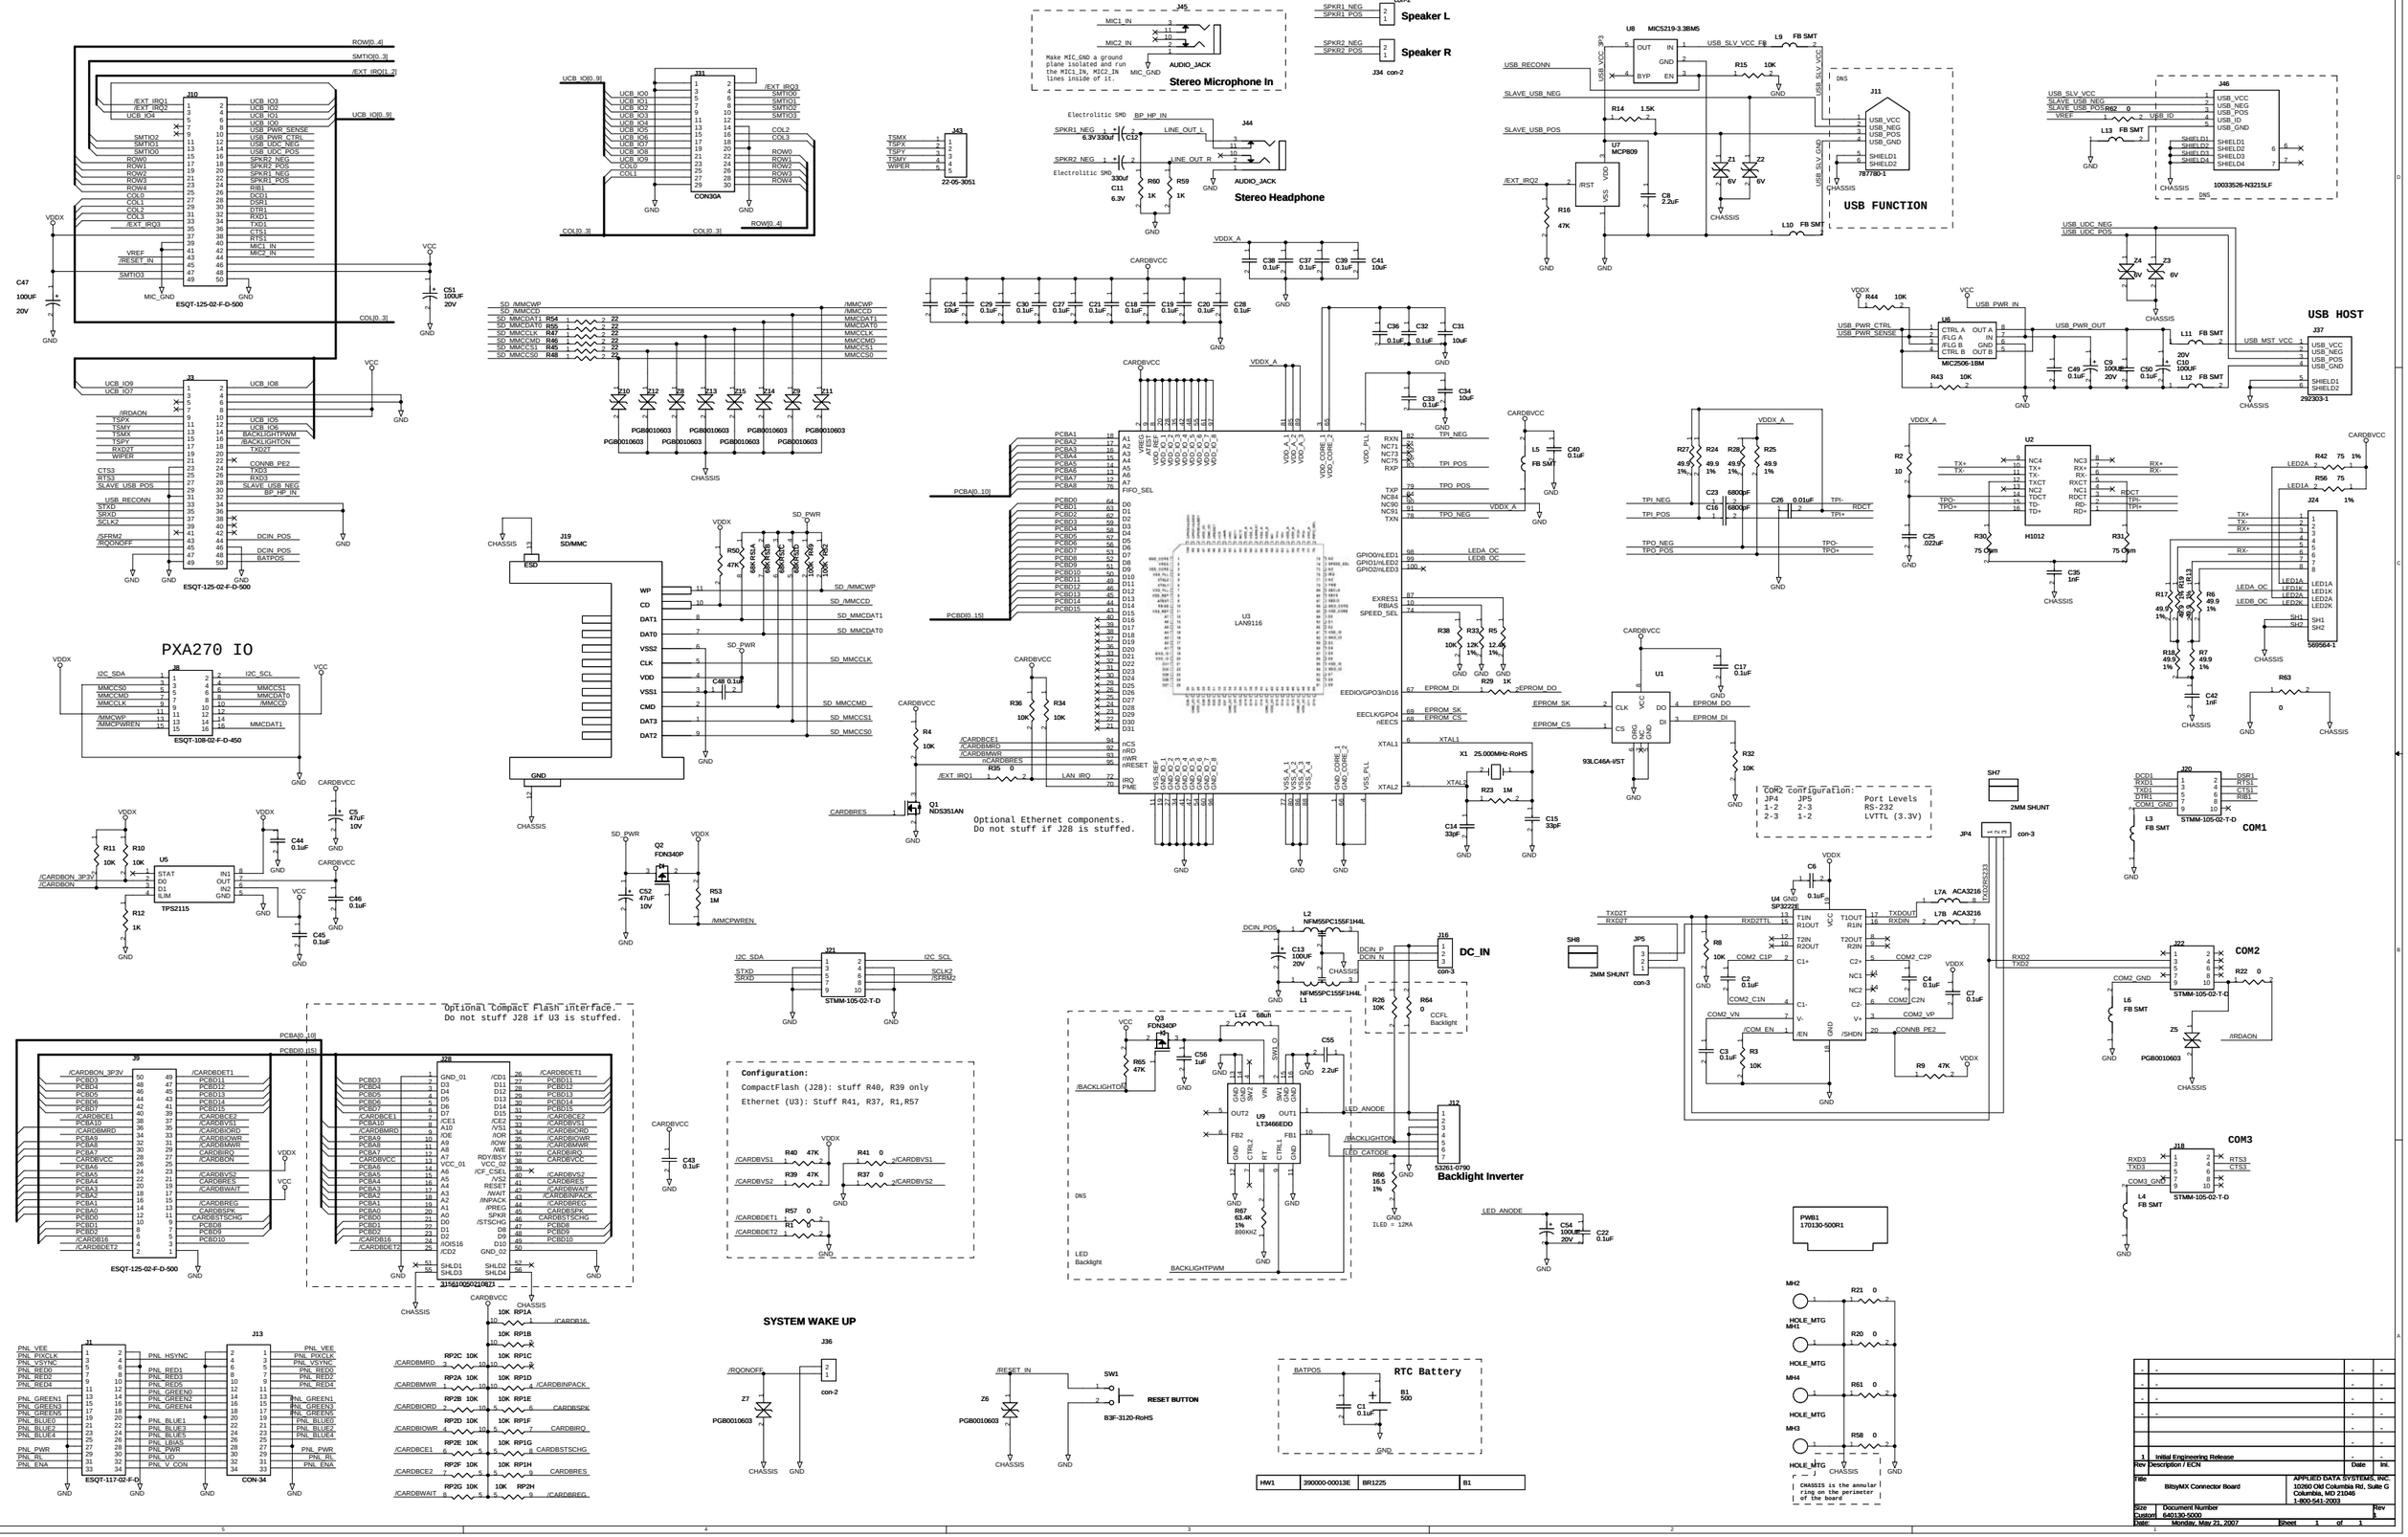
Stereo Microphone In
Make MIC_GND a ground plane isolated and run the MIC1_IN, MIC2_IN lines inside of it.
Speaker L
Speaker R
Stereo Headphone
USB FUNCTION
USB HOST
PXA270 IO
ESQT-125-02-F-D-500
ESQT-108-02-F-D-450
ESQT-125-02-F-D-500
Optional Ethernet components.
Do not stuff if J28 is stuffed.
Optional Compact Flash interface.
Do not stuff J28 if U3 is stuffed.
Configuration:
CompactFlash (J28): stuff R40, R39 only
Ethernet (U3): Stuff R41, R37, R1,R57
Backlight Inverter
SYSTEM WAKE UP
RTC Battery
DC_IN
COM1
COM2
COM3
CHASSIS is the annular ring on the perimeter of the board
Initial Engineering Release
BitsyMX Connector Board
APPLIED DATA SYSTEMS, INC.
10260 Old Columbia Rd, Suite G
Columbia, MD 21046
1-800-541-2003
Document Number
640130-5000
Monday, May 21, 2007